



CITY OF DOUGLAS WYOMING
Contract Documents & Specifications for a New
Day Cab Tractor

Douglas City Hall
101 N. 4th St.
PO Box 1030
Douglas, WY 82633

Public Works Dept.
420 W. Grant Street
PO Box 1030
Douglas, WY 82633

**City of Douglas
Call for Bids (Equipment)**

Sealed bids for a **New Specified 2025 Day Cab Tractor** will be received in the office of the City Clerk until **2:00 p.m., July 31, 2024** and read immediately thereafter in the Council Chambers at City Hall, 101 N. 4th St., Douglas, WY. Approved specifications and contract documents may be obtained at the Public Works Dept., 420 W. Grant Street, or on the City of Douglas website at www.cityofdouglas.org under the “Bid Postings” tab. Mail submitted bids to the City Clerk, City of Douglas, P.O. Box 1030, Douglas, WY 82633, or deliver to the City Clerk at 101 N. 4th Street, Douglas, WY. The City of Douglas reserves the right to reject any and all bids, to waive informalities, and to accept the bid that serves the best interests of the City./s/, City Clerk

Published: **July 17, 2024 & July 24,2024**

End of Section



CITY OF DOUGLAS BID INFORMATION

Seal bids will be received until **2:00 p.m. on July 31, 2024**, at the office of the City Clerk the same day in the Council Chambers of the City Hall Building at 101 North 4th Street, Douglas, Wyoming, for a **New Specified 2025 Day Cab Tractor**. Details and specifications may be obtained by contacting the City Clerk, 101 North 4th, Douglas Wyoming 82633; at the Public Works Department, 420 West Grant, Douglas Wyoming 82633-2153; or on the City of Douglas website at www.cityofdouglas.org under the “Bids” tab. **Bids received after the specified hour will not be accepted.**

Demonstrative units will not be accepted or considered in the bid proposal. Details and specifications may be obtained by contacting the City Clerk, 101 North 4th, Douglas, Wyoming 82633 or the Public Works Department, 420 West Grant, Douglas, Wyoming 82633-2153. Bids received after the specified hour will not be accepted.

Delivery will be accepted, F.O.B. Douglas, Wyoming. All complete bids must be F.O.B. the City of Douglas, Public Works Department, 420 West Grant, Douglas, Wyoming 82633-2153. Tax Exempt Certificate will be furnished by the City of Douglas.

All bids must be clearly marked **New 2025 Day Cab Tractor** with the bidder’s name and the time and date of the opening on the outside of the envelope. A Bid Bond or Letter of Credit of 5% will be required at the time the bid is opened. The City of Douglas will allow a 5% preference to Wyoming residents. Bidders will supply a Certificate of Residency in compliance with the Wyoming Department of Labor and Statistics.

No qualified individual with a disability shall, by reason of such disability, be excluded from participation in or be denied the benefits of the services, programs or activities of the City of Douglas, or be subjected to discrimination. Pursuant to the American’s with Disabilities Act, reasonable accommodation for persons with disabilities who wish to participate in these services, programs or activities shall be made upon request to City of Douglas, American Disability Act Coordinator at Douglas City Hall, 101 North 4th Street, Douglas, Wyoming 82633.

The City of Douglas reserves the right to reject any or all bids, to waive informalities in any bid received and accept any bid which best serves the interest of the City of Douglas.

The City of Douglas is letting bids for **New Specified 2025 Day Cab Tractor**. The specifications are for and the purpose and intent of this document is to specify the purchase of a **New Specified 2025 Day Cab Tractor**. Any model bid shall meet or exceed the prescribed requirements. It is unacceptable to add or change components and/or materials to a unit or lesser design capability, in order, to meet these requirements.

The bidder shall indicate his compliance with a “Yes” or non-compliance with a “No” in each line item specification. Where submitted literature does not support the meeting of these specifications, the bidder shall outline fully on company letterhead stationery the variation from specification. Any unit

(Proposal must be filled out, signed and submitted with the bid document)
**PROPOSAL FOR FURNISHING NEW SPECIFIED 2025 DAY CAB TRACTOR FOR THE
CITY OF DOUGLAS, WYOMING**

Proposal of (Name): New 2025 Peterbilt 567

(Address): 1555 View Drive, Casper, WY, 82601

to furnish equipment as specified to the City of Douglas, Wyoming, in accordance with specifications dated (insert date).

BID ITEM:

Description: 2025 Day Cab Tractor


Make and Model: Peterbilt 567

I. Price bid for (unit) as specified FOB	
a. Douglas, Wyoming	\$ <u>207,409</u>
II. Less trade-in allowance:	\$ <u>0</u>
III. Net Price: (City to pay only this amount)	\$ <u>207,409</u>

In addition to this proposal, the undersigned herewith submits complete information including specifications and descriptive literature to fully describe and illustrate the equipment and accessories offered.

Bidder proposes to deliver equipment in accordance with the schedule above. A bid bond, certified, or cashier's check made payable to the City of Douglas, Wyoming, in an amount of 5% of the total amount of this bid is enclosed. The undersigned certifies that he understands the specifications relating to said bid security and agrees to the conditions set forth in said specifications.

Submitted by: Peterbilt of Wyoming

Signature:  Company

Title: Truck Sales Representatvie

End of Section



IF BIDDER IS:

AN INDIVIDUAL

By: _____ doing business as: _____
(Name)

Address: _____ Phone: _____

A PARTNERSHIP

By: _____ (seal)
(Firm Name)

(General Partner)

Business Address: _____ Phone: _____


A CORPORATION

By: Peterbilt of Wyoming of Wyoming
(Corporation Name) (State of Incorporation)

By: Am Carpenter Business Manager
(Signature) (Title)

ATTEST: _____ (Corporate Seal)

Business Address: 1555 View Dr Phone: (307) 237-9388
Casper WY 82601

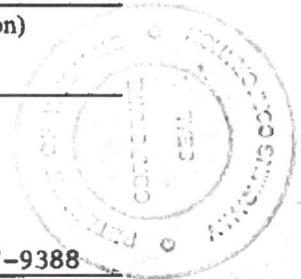

A JOINT VENTURE

By: _____ Address: _____

By: _____ Address: _____

By: _____ Address: _____

By: _____ Address: _____

(Each member of the joint venture must sign; attach additional sheet if necessary.)

End of Section



NOTICE OF AWARD

To: _____

Equipment description: _____

The owner has considered the bid submitted by you for the above described work in response to its advertisement for bids dated _____, 20__ and information for bidders.

You are hereby notified that your bid has been accepted for item/s in the amount of:

Base Bid _____

Option #1 - \$ _____ Description _____

Option #2 - \$ _____ Description _____

Option #3 - \$ _____ Description _____

Option #4 - \$ _____ Description _____

Total bid amount: \$ _____

You are required, as set forth in the bid specifications, to execute any documents within ten (10) days from the date of this notice. If you fail to execute said documents, owner will be entitled to consider all rights arising out of the owner's acceptance of your bid as abandoned and as a forfeiture of your bid bond. The owner will be entitled to such other rights as may be granted by law.

You are required to return an acknowledged copy of this Notice of Award to the owner.

ACCEPTANCE OF NOTICE

Receipt of the above Notice of Award is hereby acknowledged by:

Owner

Name

Title

Date

Company

Name

Title

Date

End of Section



SPECIFICATIONS

Specifications for **One (1) New 2025 Day Cab Tractor**. These are the minimum specifications for this vehicle; **you must meet or exceed these specifications**. Mark “Yes” if item meets specifications; mark “No” if not. If indication “No” is marked to any specifications, you must provide on a separate sheet of paper an explanation of the item that you would supply in place of the specified item. Any item not marked may result in rejection of the bid.

SCOPE: The truck being specified will be used by the City of Douglas and will be assigned specifically to the Public Works Sanitation Department. The truck will operate daily by pulling loaded walking floor trailers to landfill and returning empty.

I. ENGINE & ENGINE EQUIPMENT:	Yes	No
1. Cummins X15 565 HP @ 1900 RPM	X	
2. 1850 LB/Ft Toque @1000 RPM	X	
3. 1500-watt 115 volt coolant heater & 300-watt oil pan heater w/ receptacle mounted under LH door	X	
4. Dry type air cleaner & restriction gauge mounted on air cleaner housing	X	
5. 1600 sq in Heavy duty radiator with refuse protection package		X
6. Automatic OTR regeneration and dash mounted regeneration request switch	X	
7. Urea system with gauge in dash indicating urea tank level	X	
8. LH 8 Gallon diesel exhaust fluid (DEF) tank	X	
9. Stainless steel after treatment device/muffler/tailpipe/shields	X	
10. RH outboard under step mounted horizontal after treatment system	X	
11. RH curved vertical tailpipe B-Pillar mounted routed from step	X	
12. Variable speed viscous fan drive w/ automatic fan control and dash switch	X	
13. Electronic engine integral shutdown protection system	X	
14. 12 Volt 160amp alternator w/ remote battery sense	X	
15. (3) 2775 CCA 12V group 31 AGM batteries w/ in cab disconnect switch	X	
16. Passenger seat battery box vented to outside of cab w/ jump start provision by starter	X	
17. One piece steel refuse skid plate under engine & radiator screen w/ fumoto drain valves on oil pan		X

II. ELECTRONIC PARAMETERS:	Yes	No
1. PTO Dash Switch programmed to engage while parked, roll in neutral after engagement	X	
2. 78 MPH road speed		X
3. Cruise control speed limit same as road speed		X
4. PTO mode cancel speed 20 MPH	X	

III. TRANSMISSION & TRANSMISSION EQUIPMENT:	Yes	No
1. Eaton Fuller RTLO-20918B 18 Speed manual transmission	X	
2. Transmission drive PTO to drive hydraulic wet kit	X	
3. Hydraulic wet kit to produce 35 gpm @ 3000 psi w/ relief set to 2800-3000 psi	X	

4. 50 gallon aluminum hydraulic tank mounted above frame back of cab	X	
5. Wet Kit lines and connectors to match City of Douglas walking floor trailers	X	
6. Transmission oil to air cooler	X	
7. Synthetic transmission fluid	X	

IV. FRONT AXLE & EQUIPMENT:	Yes	No
1. 14,600# taper leaf suspension w/ 14,700# 3.74 drop single front axle		X
2. 16.5X5 Q+ Cast Spider cam front brakes, double anchor, fabricated shoes		X
3. Cast iron front brake drums w/ dust shield	X	
4. Vented front hub caps with window	X	
5. Automatic front brake slack adjusters	X	
6. Power steering with power steering pump	X	
7. Front shock absorbers	X	
8. Synthetic 75w-90 front axle lube	X	

V. REAR AXLE & EQUIPMENT:	Yes	No
1. Cummins RT-40-160 40,000# R-Series tandem rear axles		X
2. 3.73 rear axle ratio		
3. Iron rear axle carrier with standard axle housing	X	
4. RPL25SD Meritor main driveline with RPL20 interaxle driveline	X	
5. Brake drum dust shields	X	
6. Driver controlled traction differential	X	
7. (1) driver controlled differential axle valve & (1) interaxle lock valve	X	
8. Brake cams & chambers on front side of drive axles	X	
9. Indicator lamp with each mode switch, differential unlock with road speed > 25 MPH, activate only at <5 MPH	X	
10. 16x.5X8.62 Q+ cast spider cam, double anchor, fabricated shoes	X	
11. Brake cams and chambers on rear side of drive axle		X
12. Cast iron rear brake drums	X	
13. Wabco Tristop D Longstroke 2 drive axle spring parking chambers		X
14. Haldex automatic rear slack adjusters	X	
15. Synthetic 75w-90 rear axle lube	X	

VI. REAR SUSPENSION:	Yes	No
1. Airliner 40,000# rear suspension w/ chain clearance	X	
2. 59 inch axle spacing		X
3. Rear Shock Absorbers on both axles	X	
4. Suspension dump switch w/ auto fill above 5 mph	X	
5. Single air suspension leveling valve	X	

VII. PUSHER AXLE:	Yes	No
1. Hendrickson Ex13 13,500# Air Lift Steerable Pusher	X	
2. Aluminum pusher hubs	X	
3. Auto lift in reverse	X	
4. Dash valve & gauge, regulator chassis mounted	X	
5. Positioned 54 inches ahead of front drive axle	X	
6. Auto slack adjusters	X	
7. Dust shields on brakes	X	
8. 15x4 cam brakes, double anchor, fabricated shoes	X	
9. 22.5x8.25 10 HUB piloted 2-hand steel wheels	X	
10. 11R22.5 16ply radial pusher tires	X	

VIII. BRAKE SYSTEM	Yes	No
1. Wabco 6S/6M ABS with traction control & traction control shut off switch on dash	X	
2. Reinforced nylon, fabric braid and wire braid air lines	X	
3. Fiber braid park brake hoses		X
4. Relay valve with 5-8 PSI crack pressure for tandem axles, & 3-4.5 for pusher axle		X
5. Wabco System Saver HP air dryer with heater & coalescing filter		X
6. Air dryer mounted under hood		X
7. Steel air tanks	X	
8. Pull cables on drain valves of all air tanks	X	
9. 15 ft straight air hose & electrical cable for trailer	X	
10. 40 inch chrome pogo stick for trailer air & electrical lines mounted to deckplate	X	
11. Gladhand/electrical holder mounted to pogostick	X	

IX. WHEELBASE AND FRAME:	Yes	No
1. 5475mm (216 inch) wheelbase		x
2. 11mmX85mmX287mm steel frame 120KSI		X
3. 1525mm (60 inch) rear frame overhang	X	
4. Flange tapered end of frame	X	
5. Heavy Duty ductile iron engine crossmember	X	
6. Heavy Duty back of transmission crossmember	X	
7. Standard cast aluminum midship crossmember	X	
8. Standard rear most crossmember	X	
9. Standard cast aluminum forward crossmember	X	
10. Cast aluminum rear suspension crossmember	X	

X. CHASSIS EQUIPMENT:	Yes	No
1. Ali-arc or Herd aluminum bumper/grill guard	x	
2. Headache rack w/ jail bar window, chain hangers, and full width tray	x	
3. Mount headache rack behind hydraulic tank with enough space to add oil to tank	x	
4. Deck plate back of headache rack to fifth wheel as possible.	x	
5. :H back of cab access with grab handle	x	

6. Huck-spin round collar frame fasteners	X	
7. Single centered front tow pin	X	
8. Painted mudflap brackets w/ mudflaps	X	

XI. FIFTH WHEEL:	Yes	No
1. Jost 24 inch air slide fifth wheel, 2 inch slide increments	X	
2. Fifth wheel forward 18 inches ahead of suspension centerline	X	
3. 7.94 inch fifth wheel leg height	X	
4. Steel outboard angle fifth wheel mounting	X	
5. Dash mounted control & plumbing for fifth wheel slide	X	
6. Inside cab mounted air-actuated king pin release	X	

XII. FUEL TANK(S):	Yes	No
1. 100 Gallon/378 liter 25 inch diameter aluminum fuel tank - LH	X	
2. Fuel tank forward	X	
3. Plain step finish	X	
4. Fuel tank cap	X	
5. Davco fuel/water separator w/ ESOC & 12v preheater & water in fuel sensor	X	
6. Equiflo inboard fuel system		X
7. High temperature reinforced nylon fuel line	X	
8. Painted steel fuel tank bands		X

XIII. TIRES:	Yes	No
1. 12R22.5 16 ply radial front steer tires	X	
2. 11R22.5 16 ply radial rear traction tires	X	
3. One spare tire & wheel for the rear, One spare tire & wheel for the front.	X	

XIV. HUBS:	Yes	No
1. Pre-set plus premium iron front hubs	X	
2. Pre-set plus premium iron rear hubs	X	

XV. WHEELS:	Yes	No
1. 22.5x8.25 10-hub pilot steel disc wheels	X	

XVI. CAB EXTERIOR:	Yes	No
1. Steel reinforced aluminum conventional cab	X	
2. Air cab mounts	X	
3. Bolt-on molded flexible fender extensions	X	
4. Interior lower grab handles plus exterior LH and RH grab handles	X	
5. Hood opening assist w/ locking strut to prevent wind from slamming hood closed	X	
6. Bright hood mounted air intake grill, black screen	X	
7. Vocational hood	X	
8. Single air horn under deck	X	

9. Single electric horn	X	
10. Door lock and ignition switch keyed the same	X	
11. Stainless steel sun visor w/ LED marker lights		X
12. Daytime running lights	X	
13. Intelligent LED headlights w/ heated lens system		X
14. Rear facing turn signal lamps in convex mirrors		X
15. Dual C-bar heated mirrors w/ LH & RH remote	X	
16. LH and RH convex mirrors mounted under primary mirrors	X	
17. Dual LED Class 1 Strobe lights mounted above each door	X	
18. LH and RH Heated hood/fender convex mirrors		X
19. Roped in windshield		X
20. Power electric door window regulators	X	
21. Windshield washer reservoir, cab mounted	X	
22. Integral LED stop/turn/tail backup lights	X	

XVII. CAB INTERIOR:	Yes	No
1. Base trim package interior	X	
2. Molded plastic door panels with integrated storage pockets	X	
3. Black mats with added insulation	X	
4. Dash mounted ashtray with 12v power outlet	X	
5. (2) Cup Holders in dash	X	
6. Heater, defroster and air conditioner	X	
7. Standard heater plumbing with ball shut off valves	X	
8. Heavy duty air conditioner compressor	X	
9. Binary control, R134A	X	
10. Premium cab insulation	X	
11. Quantity of keys - 3	X	
12. 12-volt negative ground electrical system	X	
13. LED Interior Cab Lighting	X	
14. Cab door latches with electric door locks	X	
15. High back air suspension driver seat with fold down arm rests	X	
16. Passenger seat mid back non-suspension without arm rests		X
17. Heavy duty cloth driver & passenger seats	X	
18. 18 inch steering wheel with dash panel & radio switch controls	X	
19. Adjustable tilt and telescoping steering column	X	
20. Driver and passenger interior sun visors	X	

XVIII. INSTRUMENTS AND CONTROLS:	Yes	No
1. Low air pressure light and buzzer	X	
2. Dual needle primary and secondary air pressure gauge	X	
3. 97 DB back-up alarm	X	
4. Electronic cruise control with steering wheel switches	X	

5. Tractor & Trailer air brake application gauge	X	
6. 5" drivers display in instrument cluster	X	
7. Diagnostic interface connector, located LH below dash	X	
8. 2-inch electric fuel, oil pressure, engine temperature.	X	
9. Digital transmission temperature, axle temperature, voltage, outside temp in dash	X	
10. AM/FM/WB radio with front auxiliary inputs, (2) radio speakers in cab	X	
11. Power & ground provision in overhead console	X	
12. Electronic MPH speedometer with secondary KPH scale	X	
13. Electronic 2500 RPM tachometer	X	
14. Ignition switch controlled engine stop	X	
15. Pre-trip inspection feature for exterior lamps	X	
16. Single electric windshield wiper motor with delay	X	
17. PTO controls for wet kit activation	X	
18. Two valve parking brake system with warning indicator	X	
19. Self-canceling turn signal switch with dimmer, washer/wiper and hazard in handle	X	
20. Digital turbo boost in drivers display	X	
21. Three extra switches wired to end of frame	X	

XIX. PAINT AND COLOR:	Yes	No
1. Paint: one solid color	X	
2. Cab color: fleet white	X	
3. Chassis paint: black	X	
4. Wheels: white	X	

XX. WARRANTY:	Yes	No
1. Full factory warranty on cab chassis and components to be shown with the bid.	X	
2. Cab and chassis warranty will be registered by the vendor at the time of delivery. A copy of the cab and chassis warranty/registration is to be delivered with the truck.	X	
3. Engine warranty will be registered by the vendor.	X	

XXI. MANUALS:	Yes	No
1. Workshop manual online access	X	
2. Online parts catalog	X	
3. Drivers & operators manual	X	
4. Engine operator's manual	X	

End of Section





1555 View Drive, Casper, Wyoming 82601

Variation from Bid spec: New Specified 2025 Cab, Chassis and Refuse Compaction Body

Engine & Engine Equipment

- a. #5. 1379 square inch radiator place of 1600 square in.
- b. #17. Femco Oil drain valve in place of Fumoto

Electrical parameters

- a. #2 Tire speed rating allows for max speed of 75 MPH
- b. #3 Tire speed rating allows for max speed of 75 MPH

Transmission & Transmission Equipment

- a. #6 Transmission oil to Water cooler, in place of oil to air cooler

Front Axle & Equipment

- a. #1.14,600# Taper leaf suspension W/ 14,600 # 3.5" Meritor MFS+14
- b. #2. Bendix Air disc steer axle brakes in place of 16.5X5 Q+

Rear Axle & Equipment

- a. #1 Meritor RT40-160 40k axle in place of Cummins RT40-160
- b. #10 Bendix air Cam 16.5 X8.6
- c. #11 brake Cams and chambers on front side of drive axle rather than rear.
- d. #13 MGM or Haldex 30/30 air cans in place of Wabco Tri-stop D long stroke.

Rear suspension

- a. #2 60" Spacing in place of 59"

Brake System

- a. #3 Rubber park brake hoses in place of Fiber Braid
- b. #4 Relay Valve Crack pressure determined by factory per DOT regulations
- c. #5 Bendix AD-HF Air dryer with heater and Coalescing filter
- d. #6 air dryer mounted on frame at Factory discretion

Wheelbase and Frame

- a. #1 Minimum require wheelbase with lift axle is 220" WB
- b. #2 10-3/4" 120,000 PSI single rail in place of 11mmX85MMX287MM

Fuel Tank(S)

- a. #6. Equiflo Inboard System not available on single tank
- b. #8. Aluminum Fuel tank strap in place of painted steel

Cab Exterior

- a. #11. Stainless steel visor separate from Led cab lights
- b. #13 None-heated head lights
- c. #14 integrated turn signal mirror not available
- d. #18 hood mirrors not heated



1555 View Drive, Casper, Wyoming 82601

e. #19 Glued in windshield

Cab interior

a. #16. Passenger seat with left arm rest, dual not available.



Peterbilt Of Wyoming (W800)
 1555 View Drive
 Casper, Wyoming 82601

CITY OF DOUGLAS
 101 N. 4TH ST.
 PO BOX 1030
 DOUGLAS, Wyoming 82633
 United States of America

Travis Wilson
 Cell Phone: 307-256-8201
 Office Phone:
 Email: travis@pbwyo.com

Vehicle Summary

	Unit		Chassis	
Model:	Model 567	Fr Axle Load (lbs):		14600
Type:	Tractor	Rr Axle Load (lbs):		40000
Description 1:	Day cab 567	G.C.W. (lbs):		106000
Description 2:				
	Application	Road Conditions:		
Intended Serv.:	Refuse/On-Highway	Class A (Highway)		20
Commodity:	Refuse, Scrap, Recycling	Class B (Hwy/Mtn)		70
		Class C (Off-Hwy)		10
		Class D (Off-Road)		0
	Body	Maximum Grade:		6
Type:		Wheelbase (in):		220
Length (ft):	0	Overhang (in):		60
Height (ft):	0	Fr Axle to BOC (in):		74.1
Max Laden Weight (lbs):	0			
		Cab to Axle (in):		145.9
		Cab to EOF (in):		205.9
	Trailer	Overall Comb. Length (in):		807.23
No. of Trailer Axles:	3			
Type:	Refuse Transfer			
Length (ft):	48			
Height (ft):	13			
Kingpin Inset (in):	36			
Corner Radius (in):	2			
		Special Req.		
	Restrictions			
Length (ft):	40			
Width (in):	102			
Height (ft):	13.5			

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.



Sales Code	Std/Opt	Description	Weight
Base Model			
0005671	S	Model 567 The Model 567 is available in both a set-forward and set-back front axle configuration to provide customers with maximum versatility for their application requirements. For weight-sensitive applications, the set-forward front axle provides optimized weight distribution and compliance with bridge laws. The Model 567 has steer axle ratings up to 22,000 lbs. The 567 also offers single, tandem or tridem drive axles and a variety of lift axles for added versatility. Available with a 115" or 121" BBC and as a day cab or with a selection of detachable sleeper configurations, the 567 is as versatile as it is reliable.	14,800
0091180	O	Refuse, Scrap, Recycling	0
0093035	O	Refuse/On-Highway Truck or tractor which hauls refuse, recycled material, etc. Includes roll-on/roll-off container movement, as well as hauling refuse from transfer stations to, but not into, landfills.	0
0096130	O	Refuse Transfer A trailer used to haul large loads of waste from location to location.	0
0098170	S	United States Registry Canadian Registry Package Requires Air Conditioning Excise Tax Canada, Speedometer to be KPH ipso MPH, Daytime Running Lights and Rubber Battery Pad in Bottom of Battery Box.	0
Configuration			
0200700	S	Not Applicable Secondary Manufacturer	0
Frame & Equipment			
0514000	O	10-3/4" Steel Rails To 354" 10.75x3.5x.375 Dimension, 2,136,000 RBM; Yield Strength: 120,000 psi. Section Modulus: 17.8 cubic inches. Weight: 1.74 lbs/inch pair	333
0611250	O	Heavy-Duty Iron Front Spring Brackets With Front Air Leaf the front spring bracket is iron but not the shackle bracket	35
0611790	S	Aluminum Frame Rail Crossmembers Excludes suspension	0
0644000	S	EOF Tractor Tapered with Crossmember Includes Kingpin Cutout	0
0651010	S	Peterbilt Rear Mudflaps and Straight Hangers Mudflaps aid in protecting the frame and undercarriage from road salt, grime and debris that can cause rust and corrosion. Mud flaps also shield other vehicles from gravel, rocks and road spray.	0
0673010	O	Polyarmor Black Quarter Fenders with Peterbilt Heavy duty black 24" x 24" Polyarmor Quarter Fender made with polymer material that is chip, dent and scuff resistant. Cost effective protection with style. Peterbilt logo on the flap.	25
0674110	O	Locate Quarter Fender Ahead Of Forward Drive Axle Requires quarter fender option.	0

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/ Opt	Description	Weight
0854130	O	JOST JSK37 Fifth Wheel, Low Lube Top Plate The JOST JSK37 product line begins with a cast ductile iron topplate that is a popular choice among national fleets and owner operators.	244
0870000		Rear Or Fixd Setting Centerline Bogie	0
0890090	O	LH Fifth Wheel Release	0
0890550	O	7.6in - 8in Fifth Wheel Height	95
0890660	O	Outboard Mounting IPO Inboard Outboard mount is low-weight, no welding modular base design, offers weight savings with easy height change. Air Slide Only.	62
0891240	O	24" Air Slide	216
0898030	O	Fifth Wheel Slide Controls Provided with Speed Interlock to prevent accidental activation above 7 MPH. Configurable from 5 to 10 MPH. Required with sliding Fifth Wheels.	2
0898080	O	Kingpin Release Provided with Pneumatic & Software Interlocks to prevent activation unless park brakes are set.	5
0960010	O	Frame Mounted Deckplate And Access Pkg, RH Side	41
0960040	O	Extended Deckplate Rearward To Fifth Wheel	10
Front Axle & Equipment			
1012330	O	Meritor MFS+14F 14,600 Lb, 3.5" Drop	39
1112150	O	Taper Leaf Springs, Shocks 14,600 lb Hendrickson Taper Leaf Springs, shocks 14,6000 lb.	57
1233050	O	Power Steering TRW TAS85 TRW TA85 Power Steering for use with 14,600 lb. axle ratings. Glidekote splines on steering shaft extend service life of components.	7
1250180	S	Power Steering Reservoir Frame Mounted The power steering reservoir is a steering system that eases drivability by applying hydraulic pressure to the steering gear.	0
1354850	O	PHP10 Iron PreSet PLUS Hubs - Air Disc Preset iron hub assemblies are designed for demanding conditions and require less maintenance while still offering dependability and superior performance. Precisely engineered to minimize roller stress under heavy loads and increase bearing life when used in demanding conditions such as wide-based single wheels and misalignment due to spindle wear.	42
1380290	S	Bendix Air Disc Front Brakes Bendix air disc front brakes use a floating caliper design to provide foundation braking on all axles and complies with reduced stopping distance regulations.	0

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/ Opt	Description	Weight
1380380	S	Tenneco Shocks For Steer Axle Integrated front suspension to suit heavy duty truck market, combining the air spring and the damper into one module.	0
1380470	O	Meritor Wide Track IPO Standard, Front Axle Meritor wide track front axle offers greater turning radius and ease of service. MFS+ 3.5" Drop / MFS 3.74" Drop. 71in KPI IPO 69in with MFS and MFS+ axles.	15
Rear Axle & Equipment			
1521630	O	Meritor RT40-160 40,000 lb	578
1604126	O	Hendrickson EXS13 Self-Str Pusher 13.5K Lb, Includes (1) Air Tank	1,114
1607154	O	54in Pusher Axle Spacing From Centerline of Forward Drive Axle	0
1615170	O	PHP10 Aluminum PreSet PLUS Hubs, Cast Drums With 13.5K or 20K Self-Steering Pusher Axles	0
1616300	O	PHP10 Iron PreSet PLUS Hubs	0
1660000	O	Dust Shields For Cam Brakes, Drive Axle(s)	4
1680390	S	Bendix ESP Electronic Stability Program With ATC Tractor service only. The Bendix ESP system is designed to continuously monitor a variety of vehicle parameters and sensors to determine if the vehicle is reaching a critical stability threshold. If such a situation develops, the system will quickly and automatically intervene to assist the driver by selectively applying tractor and trailer brakes, and de-throttling the engine.	0
1680440	O	Refuse Service Brakes, Steer And Drive Axles Designed for heavy-duty applications for refuse industry, providing long brake life, safety and performance.	0
1680790	O	Diff Lock, Rear-Rear Axle With speed interlock. Automatically disengages wheel diff lock at speeds above 25 mph.	60
1682710	S	Anti-Lock Braking System (ABS) 6S6M ABS-6. Includes air braking system.	0
1683235	O	Omit Tire Pressure Monitoring System	0
1684200	S	Synthetic Axle Lubricant All Axles Peterbilt heavy duty models include Fuel Efficient Cognis EMGARD FE75W-90 which provides customers performance advantages over current synthetic lubricants with reduced gear wear and extended maintenance intervals, resulting in increased uptime. In addition, the lubricant provides improved fluid flow to protect gears in extreme cold conditions and withstand the stress from high temperatures, extending component life.	0
1685270	O	Lift Axle Regulator & Gauge Tie Strap To Rail Lift axle regulator and gauge tie strap to rail, with switch and gauge in dash. Additional gauges in road tools box.	0

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/ Opt	Description	Weight
1685460	O	Stowed Lifted Axle Higher To Maximize Ground Clearance	0
1687020	O	Bendix Air Cam Rear Drum Brakes 16.5x8.6 Bendix Air Cam Rear Drum Brakes to fit all heavy haul, construction, refuse and highway truck and tractor applications. Includes Automatic Slack Adjusters & Outboard Mounted Brake Drums. Refer to TSB 11-57 for more information.	0
1703730	O	Ratio 3.73 Rear Axle	0
1821820	O	Peterbilt Air Trac 40,000 lbs, 60in Axle Spacing Light Weight	170
1922260	O	Dash Mtd Dump Switch with Indicator Light Dash mounted dump switch with indicator light for suspension.	2
Engine & Equipment			
2059213	O	X15 565@1900 GOV@1900 1850@1000 Performance Series (2024 Emissions)	465
		N21350 C121 75...Maximum Accelerator Vehicle N21370 C128 75...Maximum Cruise Control Speed N21460 C132 1400..PTO Maximum Engine Speed N21520 C133 5.....Idle Shutdown Timer N21610 C188 39....Idle Shutdown Cold Ambient A N21620 C189 60....Idle Shutdown Intermediate A N21630 C190 80....Idle Shutdown Hot Ambient Ai N21550 C206 35....Idle Shutdown Percent Engine N21340 C209 120...Maximum Vehicle Speed N21510 C225 YES...Idle Shutdown with Parking B N21450 C231 NO....Gear Down Protection N21570 C233 NO....Idle Shutdown Manual Overrid N21440 C234 NO....Engine Protection Shutdown N21480 C238 NO....Cruise Control and Engine Br N21470 C239 NO....Cruise Control Auto-Resume N21430 C333 0.....Driver Initiated OverrideMax N21410 C334 0.....Driver Initiated Override Ma N21590 C382 YES...Idle Shutdown Hot Ambient Au N21500 C395 0.....Green House Gas Automatic En N21530 C396 YES...Idle Shutdown Warning Period N21540 C397 60....Idle Shutdown Warning Period N21320 C399 120...Green House Gas Vehicle Spee N21400 C400 252...Driver Initiated Override Re N21420 C401 10....Green House Gas Vehicle Spee N21330 C402 0.....Green House Gas Vehicle Spee	
2091120	S	EMUX Electronics Architecture	0
2091310	O	Engine Idle Shutdown Timer Disabled	0
2091315	O	Enable EIST Ambient Temp Overrule	0

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/ Opt	Description	Weight
2091372		Eff EIST NA Expiration Miles	0
2091638		Effective VSL Setting 65.0 MPH or Greater (USA)	0
2092018	O	Typical Operating Speed 75 MPH	0
2092032	O	Powertrain Optimized for Performance Best analysis for vehicles used in vocational applications or with heavy GCWRs.	0
2120160	O	Cummins TRV For DAVCO Only For Fuel Filter, X15	0
2140230	O	Femco Oil Drain Valve	0
2140410	S	Engine Brake Controls Located on RH Column	0
2140450	O	Remote PTO/Throttle, 12-Pin Eng Bay Remote Control Provision	0
2140670	O	EPA Emission Warranty	0
2140700	S	EPA Engine Idling Compliance	0
2141000	O	Steel Front Engine Support IPO Standard Aluminum	20
2141990	O	Omit Chevron Engine Oil Sticker (DELO)	0
2511400	O	160 Amp Alternator, 36 SI Brushless The 33SI is a heavy duty brushless alternator that provides more output and service life for today's diesel powered vehicles with large electrical load requirements. The 33SI is offered in 12 volt and 24 volt models with a J180 hinge mount.	10
2516070	O	Remote Voltage Sense Wiring	0
2521090	S	Immersion Type Block Heater 110-120V Standard location is left-hand under cab, Model 520 is in bumper, and for Model 220 it is at the driver step. Plug includes a weather-proof cover that protects the receptacle. This pre-heater keeps the coolant in the engine block from freezing when the engine is not running.	0
2521110	O	Oil Pan Heater 120V/300W Oil Pan Heater 120V/300W operates via 120V ShorePower system and keeps oil warm and free flowing for instant lubrication with oil and transmission immersion heaters when the engine is not running. This option utilizes the same receptacle as the immersion pre-heater if specified together.	2
2522110	O	PACCAR 12V Starter, N/A PACCAR MX Engines PACCAR 12-volt electrical system. With centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0
2538120	O	3 PACCAR AGM 12V Batteries 2775 CCA	0

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/ Opt	Description	Weight
2539410	O	Battery Jumper Terminal Mounted Under Hood LH Frame Rail. Not available with PX-7 engines.	4
2539720	S	Low Voltage Disconnect System	0
2621000	O	2-Speed Fan Clutch For Frequent Start/Stops A 2-speed fan clutch is ideal for vocational applications where the fan clutch engagement time exceeds 10% of the engine run time. When the fan clutch is disengaged, the fan still rotates at 15-25% of the engine RPM. This fan rotation provides crucial airflow to the engine and draws virtually no horsepower.	0
2723220	O	18.7 CFM Naturally Aspirated Air Compressor X15 Only	0
2812170	O	Intebrake (Furnished on Engine) Features a dedicated cam lobe design for optimum power and three-stage engine brake operation.	0
2921130	O	DAVCO 382 Fuel/Water Separator The Fuel Pro 382 is a combination of diesel fuel filtration and water separator that is recommended for heavy-duty diesel engines with flow rates up to 180 gallon/hour.	0
2921320	O	12V Heat for Fuel Filter Fuel filter heaters help ensure a seamless flow of diesel from the tank to the combustion chamber. Eliminating any possibility of moisture freezing within the fuel filter while simultaneously increasing the fuel temperature for atomization within the engine.	0
3010400	O	Engine Protection Shutdown w/ Label Includes oil pressure, oil temperature, coolant temperature, and intake manifold temperature.	0
3114270	S	High Efficiency Cooling System Cooling module is a combination of steel and aluminum components, with aluminum connections to maximize performance and cooling capability. Silicone radiator & heater hoses enhance value, durability, & reliability. Constant tension band clamps reduce leaks. Chevron Delo Extended Life Coolant (NOAT) extends maintenance intervals reducing maintenance costs. Anti-freeze effective to -30 degrees F helps protect the engine. Low coolant level sensor warns of low coolant condition to prevent engine damage. Radiator Size by Model: 520 1202 sq in, 579 1456.9 sq in, 535/536/537/548 949.3 sq in, 537/548 VOC 1000.3 sq in, 389 HH 1604 sq in, 567 1379 sq in.	0
3291680	S	(1) Air Cleaner Firewall Mounted Molded rubber air intake connections with lined stainless steel clamps seal to prevent contaminants in air intake.	0
3367160	S	Exhaust Single RH Side of Cab DPF/SCR RH Under Cab, Single Module	0
3381770	O	Curved Tip Standpipe(s)	1
3387870	S	24" Ht, 5" Dia Chrome, Clear Coat Standpipe(s)	0
Transmission & Equipment			
4021920	O	Eaton RTLO20918B 18-Speed	343

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/ Opt	Description	Weight
		Includes oil-to-water cooler, rear transmission support, direct shift pattern. Synthetic lubricant to reduce friction, improve efficiency, & extend component life. Magnetic transmission oil drain plug captures & holds any metal fragments in transmission oil to extend service life. Torque limiting clutch brake. Forward ratios: LL-14.4, L-12.29, 1st-8.51, 2nd-7.26, 14th-1.00, 15th-0.86, 16th-0.73. Reverse ratios: R1-15.06, R2-12.85, R3-4.03, R4-3.43	
4210870	O	RPL20 Driveline Interaxle Requires RPL20 Driveline interaxle (option 4210870) for tandem rear axles. RPL20 series drivelines are built for heavy-duty commercial vehicles and are permanently lubricated and sealed for life with triple lip seals to protect against contaminants. All Meritor drivelines will be primed before painted, improving paint adhesion for longer lasting quality in the field.	0
4211360	O	RPL25 SD Driveline, 1 Midship Bearing All Meritor drivelines will be primed before painted, improving paint adhesion for longer lasting quality in the field.	120
4233900	O	(1) Dash Mounted Single Acting EOA PTO Control Electric-over-air (EOA), specifying PTO (power-take-off) control switch does not ensure the PTO will fit.	0
4250900	O	Main Transmission Rear Support Additional rear support for the transmission to provide a firm, durable design that improves stabilization of the drivetrain in rugged terrain	11
4256100	O	Manual Shifter, Black	0
4256250	O	Heavy Duty Input Bearing for PTO Operation For use with Fuller RTLO transmission 1100 through 2250 series. The roller style input shaft bearing has twice the dynamic radial load capability of the ball bearing style and is recommended for transmissions that will be equipped with a transmission mounted 6 or 8 bolt PTO.	0
4321000	O	Self-Adjust Clutch	0
4380220	O	Pre-Damped Clutch Pre-damped feature consists of a set of small springs around the hub, which dampen the engine torsional vibrations at idle speeds before they can reach the transmission and cause gear rattle. Option required on configurations specifying an ISX15 Family 1 engine and a manual transmission with torque ratings of 1650 lb-ft torque or higher.	0
4380370	O	Remote Lube Hose For Release Bearing Mounted under hood left-hand rail	2
Air & Trailer Equipment			
4510210	O	Bendix AD-HF EP Air Dryer, Heater Coalescing filter, extended purge. Bendix AD-HF air filters protects the life of your engine system and components. Proven PuraGuard oil coalescing technology in the the air dryer cartridge. This oil coalescing filter ensures the removal of oil and oil aerosols before they can contaminate the moisture removing desiccant.	6
4520420	O	Pull Cords All Air Tanks	1

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/Opt	Description	Weight
4540100	O	Wire Braid Chassis Hose	55
4543320	S	Steel Painted Air Tanks All air tanks are steel with painted finish except when Code 4543330 Polish Aluminum Air Tanks is also selected (then exposed air tanks outside the frame rails will be polished aluminum). Peterbilt will determine the optimal size and location of required air tanks. Narratives requesting a specific air tank size or location will not be accepted for factory installation. See ECAT to determine number or location of air tanks installed.	0
4610920	S	Self-Returning Brake Hand Valve Dash mounted controls	0
4611170	O	15' AE Lines Straight 3 In 1, (2) 7-Way Plugs BOC socket, W/O QCMS2; M7 end	0
4611630	O	Chroming Of Hose Tenna	0
4614810	S	AE Connections BOC/BOS, Hose Tenna	0
Tires & Wheels			
5004510	O	FF: CN 16ply 12R22.5 HSR3	66
5150170	O	RR: MN 16ply 11R22.5 X Multi D+	60
5190008	S	Code-rear Tire Qty 08	0
5210600	O	FF: Accur Stl Armor 50291PK 22.5X8.25 Heavy Duty, 2 Hand Holes	34
5310600	O	RR: Accur Stl Armor 50291PK 22.5X8.25 Heavy Duty, Two Hand Holes	136
5390008	S	Code-rear Rim Qty 08	0
5470522	O	PR: (2) CN 16ply 11R22.5 HSR3 (1) self-steering pusher axle.	266
5481060	O	PR: (2) Accur Steel Armor 50291PK 22.5X8.25 (1) self-steering pusher axle.	168
Fuel Tanks			
5554190	O	26" Aluminum 100 Gallon Fuel Tank LH U/C Includes steps for cab access. Paddle handle filler cap with threadless filler neck. Top draw fuel plumbing reduces chance of introducing air into the fuel system during low fuel level conditions due to the central placement of fuel pickup tube. Wire braid fuel lines increase durability & reduce potential for leaks.	22
5602100	O	Location LH U/C 100 Gallon	0
5650490	O	Fuel Cooler	15

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/ Opt	Description	Weight
		Required with single fuel tank	
5652930	O	DEF Tank Mounted LH BOC Raised Use in addition to DEF tank option	0
5653130	O	DEF To Fuel Ratio 1:1	0
5655059	O	DEF Tank Rectangular, 8 Gal	22
5760010	O	RH Tank None Furnished	-86
Battery Box & Bumper			
6010390	O	Omit Standard Battery Box Use with passenger seat/in-cab battery box codes only	-45
6040550	S	Aftertreatment Aluminum Non-Slip Cab Entry Aftertreatment right-hand under cab step. DPF/SCR for diesel engines, catalyst for natural gas engines. On Models 579 specifying chassis fairings, the box is aerodynamic.	0
6122080	O	Temporary Bumper For F/O Applications	0
6132450	O	Heavy Duty External Tow Eye IPO Standard, N/A With FETPO	42
Cab & Equipment			
6515700	O	Vocational 121" BBC Alum Cab and Metton Hood SBFA Stainless crown and grille with tilt assist.	30
6540160	O	Thermal Insulation Package in Cab The thermal insulation package is designed to make the cab thermally efficient in extreme temperatures. The model 520 adds insulation surrounding the doghouse to reduce engine heat transmitted to the cab.	0
6540660	O	SmartSound Cab Insulation Package Cab acoustic insulation package for day cabs. Includes insulated inside firewall, top side floor damping, absorber treated kick panels, and insulated backwall and roof structure.	0
6700000	S	No Sleeper Selected	0
6800330	O	Rubber Fender Lips 4.5" Wide	6
6911100	S	Peterbilt ST Driver Peterbilt ST air seat, high height backrest, adjustable seat track length, 1 chamber lumbar support, suspension with fixed damping, fore-aft isolator with lockout, Vinyl bellows over suspension. Adds 40mm of increased space for steering wheel to chest and improved driver ingress/egress into cab and sleeper (knee sweep) with improved passenger side ingress/egress for personal carog/luggage. Standard vinyl finish - color coordinate with interior color.	0
6921740	S	Peterbilt ST Non-Adjustable Passenger Seat Standard vinyl, no suspension cover, no seat back recline.	0
6930580	O	Drivers Armrests - LH & RH	4

Price Level: January 1, 2024
 Deal: Day cab 567
 Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024
 Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/Opt	Description	Weight
6930590	O	Passenger Armrest - LH only Required with Evolution LX seats, optional with Evolution ST Seats.	2
6939100	O	Battery Box Under Passenger Seat Only available with non-adjustable seat or no furnished passenger seat. Includes disconnect switch.	40
6939400	S	Air Ride Driver	0
6939420	S	High Back Driver	0
6939480	O	Mordura Driver	0
6939510	S	Non-Air Ride Passenger	0
6939530	O	Mid Back Passenger	0
6939580	O	Mordura Passenger	0
7000025	S	Steering Wheel With Multi-Function Includes Peterbilt logo on horn button , audio volume, seek, mute and mode button on LH pod with cruise control on/off/cancel, set/resume and accelerate/coast on the right pod.	0
7001520	S	Adjustable Steering Column - Tilt/Telescope	0
7037130	S	Prestige Interior - Sterling Gray Features single tone dash with tough, scratch resistant materials including soft touch points on top of dash. Top of dash, door panel uppers, and kick panel are charcoal to conceal dirt and mitigate wear. Includes unique technical grained A,B, C & D instrument panels with contoured doorpads, padded fabric headliner and vinyl wall panels. Superior ergonomics are achieved while maximizing productivity featuring: multiple power ports, (2) coat hooks, header-mounted domelight, power lift driver and passenger windows, LH and RH door mounted map pockets with built-in courtesy lights, driver and passenger dome/reading lights and footwell lighting. Comfort features include automatic temperature HVAC controls, 18 inch 4-spoke soft-touch steering wheel, soft-touch steering column cover, rubber flooring, (3) inside sunvisors, integrated "dead pedal, cup holder and map bin in dash.	0
7110680	O	Exterior Cab Entry Grabhandle Textured; NFPA compliant. Available on Day Cab specifications only.	0
7210540	S	Day Cab Rear Window Day cab rear window flush to back of cab.	0
7210550	S	1-Piece Glass Rear Cab Window Fixed	0
7230060	S	1-Piece Curved Windshield	0
7230360	S	Power Door Locks and Power Window Lifts Standard	0
7322010	S	Combo Fresh Air Heater/Air Conditioner	0

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/Opt	Description	Weight
		With radiator mounted condenser, dedicated side window defrosters, Bi-Level Heater/Defroster Controls, 54,500 BTU/HR, and silicone heater hoses.	
7410040	O	Outside Sunvisor - Stainless Steel Not available with 2.1M high roof sleeper.	0
7510070	S	Aero Rear View Mirror Housing, Molded Black	0
7514010	O	Peterbilt Aero Rear View Mirror, Motorized Includes top mirror with motorized, adjustable dual axis heated glass. Bottom mirror is an integrated convex surface. Includes black textured arms with breakaway feature.	3
7514050	S	Look Down Mirror Over Passenger Door with Black Housing	0
7561190	O	LH/RH Round hood Mirrors Bright Housing Convex mirrors, left hand / right hand hood mirrors with Bright finish. Includes one-piece straight arms for rearward visibility.	8
7610500	S	Air Horn Mounted Under Cab	0
7722120	O	ConcertClass, AM/FM, Weatherband, 3.5 Aux	10
7725710	O	Standard Speaker Package For Cab (2) Speakers	4
7743020	O	(1) Antenna for Factory Installed Or F/O CB, mounted vertical center BOC/BOS.	1
7748145	O	CB Terminals/Wiring Mounted Under Header With mounting bracket	2
7788335	O	Global Telematics Hardware	0
7851480	S	Peterbilt Electric Windshield Wipers With Intermittent Feature.	0
7852020	O	Cab Air Suspension	0
7852050	O	Auto Reset Circuit Protection Daycab and Sleeper	0
7900040	O	Fire Extinguisher, Ship Loose Hazmat approved UL listed/rated ABC.	7
7900090	O	Triangle Reflector Kit, Ship Loose Florescent triangle emergency road flares are designed to meet and exceed all DOT standards.	13
7901130	O	Backup Alarm (107 DB)	3
8011800	O	Drive Axle #1 Front Oil Temperature Gauge Located in Digital Cluster Display.	0
8011810	O	Drive Axle #2 Rear Oil Temperature Gauge Located in Digital Cluster Display.	0
8011830	S	Engine Oil Temperature Located in Digital Cluster Display.	0
8011850	O	Transmission Oil Temperature (Main)	0

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/Opt	Description	Weight
		Located in Digital Cluster Display.	
8021800	S	Air Filter Restriction Pressure Gauge Located in Digital Cluster Display	0
8021810	S	Brake Application Air Pressure (Tractor) Located in Digital Cluster Display.	0
8021820	O	Brake Application Air Pressure (Trailer) Located in Digital Cluster Display	0
8070090	O	(3) Additional Dash Switches with Wiring Located on dash panel C. Availability subject to dash space. Includes 4" 14 gauge wire with butt splice at rear of each additional switch.	1
8070260	O	Switch To Deactivate ATC Traction Control Bendix ATC is required on the specification. Switch is to temporarily disable the Traction Control in extreme conditions such as snow, ice or mud. The ATC warning light will display in a constant state.	0
8070810	S	Engine Manifold Pressure (Turbo Boost) Located in Digital Cluster Display	0
8070820	S	Engine Percent Torque Located in Digital Cluster Display	0
8070830	O	Main Instrumentation Panel Digital Cluster 15" Display includes: Speedometer, Tachometer, Primary Air Pressure, Secondary Air Pressure, Fuel Level, DEF Level, DPF Filter Status, Fuel Economy, Oil Pressure, Coolant Temp, and Voltmeter.	0
8076010	O	Pusher Axle Pressure 1 52mm Round, backlit. These physical gauges must be ordered in pairs and are limited to a total of 6.	0
8110070	S	Headlights Projector Module Pod Fender mounted turn signals, projector module low beam, complex reflector high beam, pod mounted	0
8120990	S	(5) Marker Lights, Aero LED On roof, visor, or fairing	0
8132215	O	(2) LED Strobe Lights Roof Mounted (2) LED strobe lights roof mounted on each side of the cab with stainless steel brackets. LED technology provides continual heavy-duty use in the toughest conditions with a weatherproof and vibration resistant design for external use. Offering four times the brightness in a more compact housing, 4.5" shorter and 3" smaller in diameter. Classified as a Class 1 light incandescent light.	10
8133960	S	Daytime Running Lights The brake interlock turns the daytime running lights off when the parking brakes are engaged. This is required on all Canadian vehicles.	0
8134160	O	Self-Canceling Turn Signal	0
8140060	O	LED Oval Stop/Turn/Tail/Backup In tractor taper end of frame crossmember	-7
8153050	O	(1) F/O Load Light, Switch, (2) 10' Wire Coils (1) furnished by owner load light, switch, (2) 10" wire coils, under cab/sleeper.	3

Paint

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1



Sales Code	Std/Opt	Description	Weight
------------	---------	-------------	--------

8500710	S	Standard Paint Color Selection	0
8530770	S	(1) Color Axalta Two Stage - Cab/Hood Base Coat/Clear Coat N85020 A - L0006EY WHITE N85500 CAB ROOF L0006EY WHITE N85300 FENDER L0006EY WHITE N85200 FRAME L0001EA BLACK N85400 HOOD TOP L0006EY WHITE	0

Shipping Destination

Options Not Subject To Discount

9400096	O	Peterbilt Severe Service Coverage 1 Year/50,000 Miles (80,000 km)	0
9407147	O	Fuel Price Index Factor \$72 NET	0
9408558	O	Prognostic Connection Fee	0
9408626	O	SmartLINQ RD - 5YR Sub Cummins Engines	0
9408703	O	Base Warr: Emissions 5YR/100K MI-EPA Engine	0

Miscellaneous

9409001	S	Day Cab / Prestige Interior (DM)	0
9409100	O	State Of Registry: Wyoming	0
9409749	O	2024 Series Emissions Engine	0

Promotions

Special Requirements

- Special Requirement 1 0098170
- Special Requirement 2
- Special Requirement 3
- Special Requirement 4

Order Comments





Total Weight (lbs)

19,836

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER

While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information

Price Level: January 1, 2024

Deal: Day cab 567

Printed On: 7/24/2024 7:21:32 PM

Date: July 25, 2024

Quote Number: QUO-1122179-H3L0N1




Shipping Destinations

Intermediate Destination: NONE


Final Destinations	Quantity
--------------------	----------

FIFTH WHEEL HEIGHT

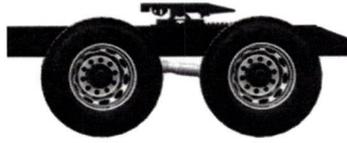

Component	Sales Code	Description	Laden	Unladen
Rearmost Fifth Wheel	0854130	JOST JSK37 Fifth Wheel, Low Lube Top Plate	8.0	8.0
Frame	0514000	10-3/4" Steel Rails To 354"	10.8	10.8
Suspension	1821820	Peterbilt Air Trac 40,000 lbs, 60in Axle Spacing	11.0	11.4
Tire	5150170	RR: MN 16ply 11R22.5 X Multi D+	19.6	20.7
Total Height			49.40	50.80

FRAME RAKE

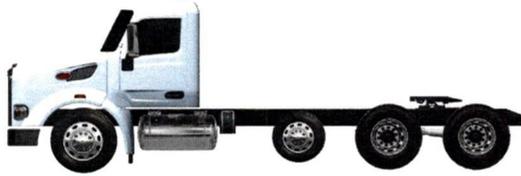


The listed heights should be considered approximations due to variations which may occur in component manufacturing processes, spring set, and the way in which the vehicle is loaded.

Component	Sales Code	Description	Laden	Unladen
Frame	0514000	10-3/4" Steel Rails To 354"	10.8	10.8
Front Spring	1112150	Taper Leaf Springs, Shocks 14,600 lb	7.3	8.9
Front Axle Drop 3.5"	1012330	Meritor MFS+14F 14,600 Lb, 3.5" Drop	0.0	0.0
Height Adj.		70mm Front Spring Spacer Blocks	2.8	2.8
Front Tires	5004510	FF: CN 16ply 12R22.5 HSR3	20.2	20.6
		Front Frame Height	41.0	43.0
Frame	0514000	10-3/4" Steel Rails To 354"	10.8	10.8
Subframe				
Suspension	1821820	Peterbilt Air Trac 40,000 lbs, 60in Axle Spacing	11.0	11.4
Rear Tires	5150170	RR: MN 16ply 11R22.5 X Multi D+	19.6	20.7
		Rear Frame Height	41.4	42.8
		Frame Rake	0.4	-0.2
		Frame Rake Slope (%)	0.2	-0.1


*These characteristics are considered to be out of standard range:
Laden rake more than 1% of wheelbase from level (positive or negative).*

HORIZONTAL DIMENSIONS

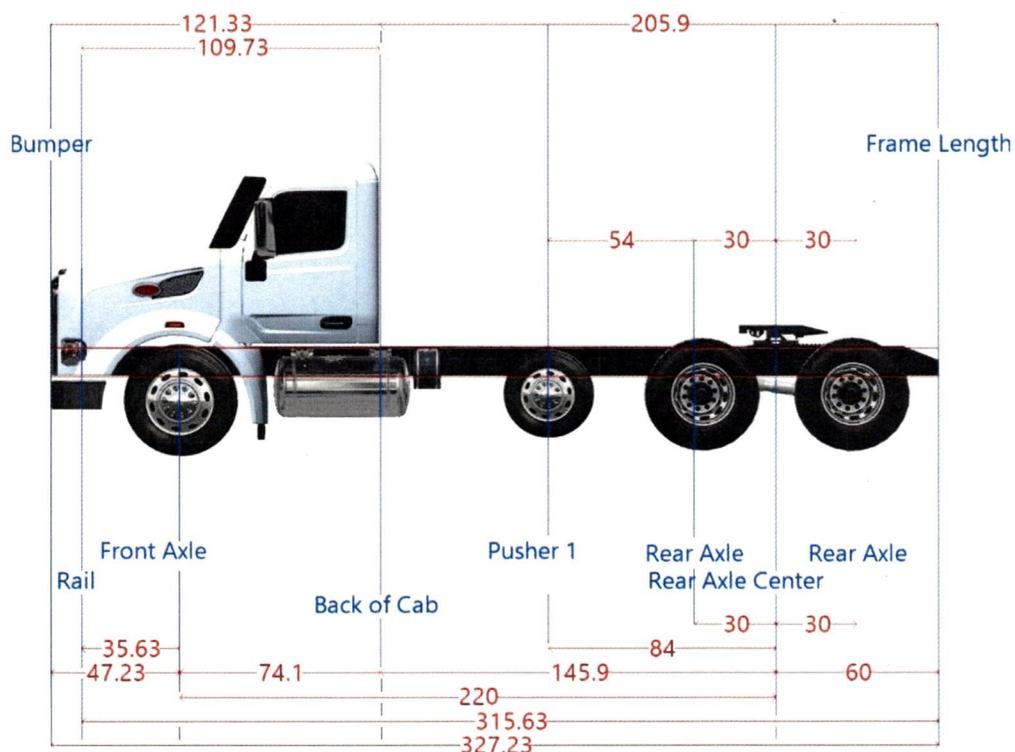

Dimension	Measurement	Start	End
Axle Spacing	60	190	250
Bumper to Back of Cab	121.33	-47.23	74.1
Bumper to Front Axle	47.23	-47.23	0
Bumper to Front Frame	11.6	-47.23	-35.63
Cab to End of Frame	205.9	74.1	280
Cab to Rear Axle	145.9	74.1	220
Effective Bumper to Back Of Cab	121.33	-47.23	74.1
Frame Length	315.63	-35.63	280
Front Axle to Back of Cab	74.1	0	74.1
Front of Frame to Axle	35.63	-35.63	0
Load Space	205.9	74.1	280
Overall Length	327.23	-47.23	280
Overhang	60	220	280
Pusher Offset #1	-24	190	220
Pusher Offset #2	0	190	220
Pusher Offset #3	0	190	220
Tag Offset	0	220	250
Wheelbase	220	0	220

SWING CLEARANCE

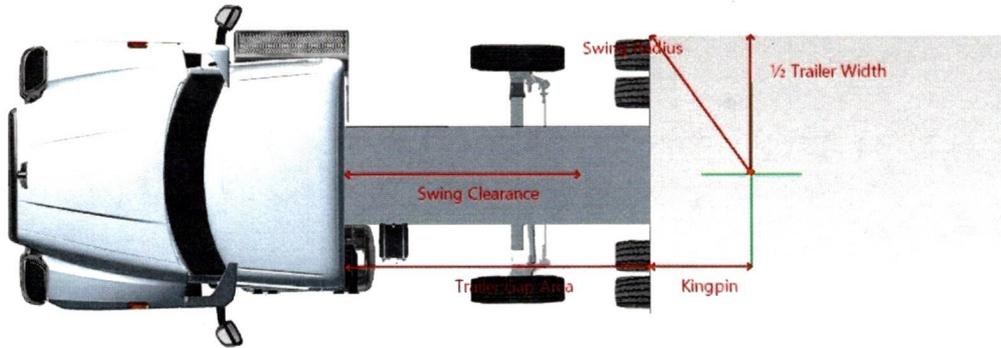

Available swing clearance shown includes the Peterbilt recommended swing and dip clearance of 7 inches for day cabs and low roof sleepers and 10 inches for high roof sleeper. For example: Available Swing Clearance = 0 on a high roof sleeper means you have 10 inches of clearance.

TRUCK AND TRAILER DATA

Wheelbase	220
Trailer Width	102
Trailer Kingpin Setting	36
Corner Radius	2
Fixed Fifth Wheel Offset	0

JACK KNIFE ALLOWANCE AND DIP ANGLE

Jack Knife Allowance	4 Inches
Dip Angle Setting	5 Degrees

FIFTH WHEEL POSITION

Rearmost Fifth Wheel Location	0 Inches
-------------------------------	----------


SWING AND DIP CLEARANCE

Available Swing Clearance	53 Inches
Max Dip Angle	7 Degrees
Max Allowable Fwd 5th Wheel Setting	77 Inches
Overall Combination Length	807 Inches
Legal Constraint Comparison	-327 Inches

TRAILER GAP

Operational Fifth Wheel Setting	0 Inches
Calculated Trailer Gap at Setting	110 Inches

TURNING RADIUS

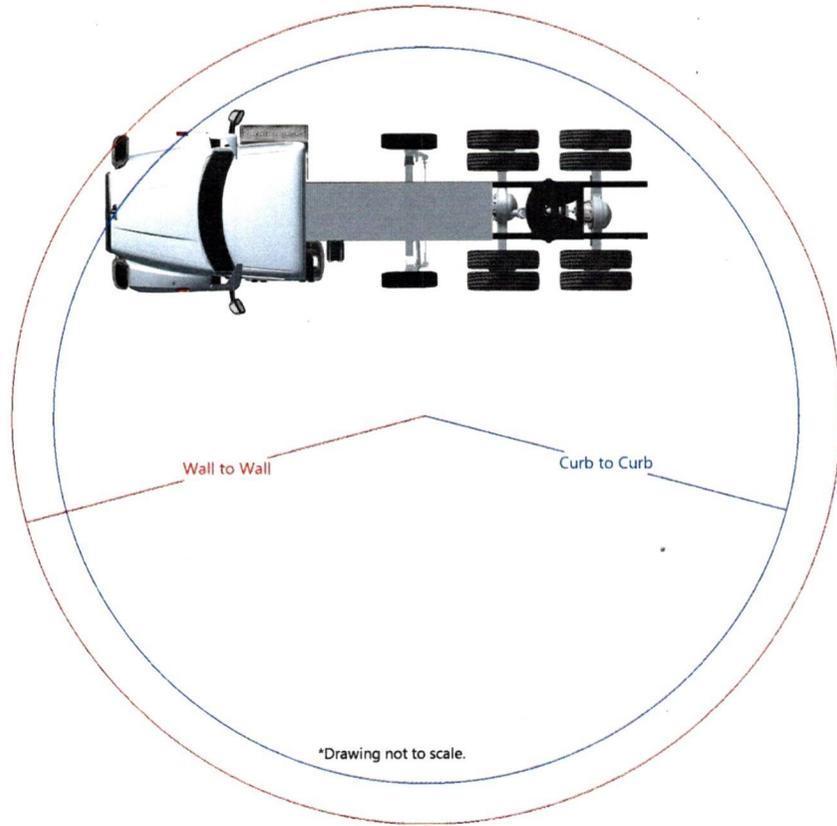

LEFT TURN RADIUS		RIGHT TURN RADIUS	
Curb to Curb	0.0	Curb to Curb	0.0
Wall to Wall	0.0	Wall to Wall	0.0

VEHICLE SUMMARY			
Truck	Model 567 / Tractor	Wheelbase	220
Axle	Meritor MFS+14F 14,600 Lb, 3.5" Drop	Weight	19836
Tire	FF: CN 16ply 12R22.5 HSR3		
Wheel	FF: Accur Stl Armor 50291PK 22.5X8.25		

VEHICLE WEIGHT RATING

FRONT AXLE COMPONENTS

Component	Sales Code	Description	Ratings
Axle	1012330	Meritor MFS+14F 14,600 Lb, 3.5" Drop	14,600
Springs	1112150	Taper Leaf Springs, Shocks 14,600 lb	14,600
Power Steering	1233050	Power Steering TRW TAS85	16,000
Hubs, Drums	1354850	PHP10 Iron PreSet PLUS Hubs - Air Disc	23,000
Brakes			
Tires	5004510	FF: CN 16ply 12R22.5 HSR3	14,780
Wheels	5210600	FF: Accur Std Armor 50291PK 22.5X8.25	16,000

Requested Front (Lbs): 0
 Minimum: 10,000
 Maximum: 14,600

The front axle weight rating cannot exceed 14600

REAR AXLE COMPONENTS

Component	Sales Code	Description	Ratings
Axle	1521630	Meritor RT40-160 40,000 lb	40,000
Hubs, Drums	1616300	PHP10 Iron PreSet PLUS Hubs	78,000
Service Brakes			
Spring Brakes			0
Suspension	1821820	Peterbilt Air Trac 40,000 lbs, 60in Axle Spacing	40,000
Tires	5150170	RR: MN 16ply 11R22.5 X Multi D+	48,040
Wheels	5310600	RR: Accur Std Armor 50291PK 22.5X8.25	64,000

Requested Rear (Lbs): 0
 Minimum: 20,000
 Maximum: 40,000

The rear axle weight rating cannot exceed 40000

(LABEL:RPTVW_GROSSCOMBINATIONWEIGHTRATING)


GCWR (lbs)	106,000
Min	64,600
Max	160,000

The Gross Combination Weight Rating rating cannot exceed 160000

WEIGHT DISTRIBUTION

Model: 567

Actual performance of a specific unit can be affected by your operating conditions. The performance calculations should only be used as a guideline.

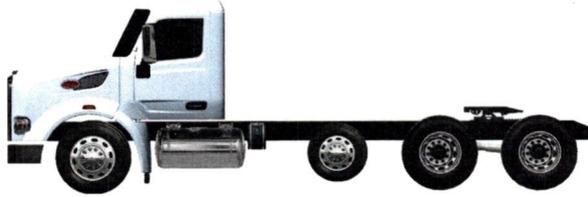

Recommended 5th wheel setting to achieve specified ground loads; measured from centerline of drive axles: 37 in. from the centerline of the drive axle(s).

Lift Axles Down


Weight (lbs)	Front	Pusher 1	Rear	Total
Chassis	10239	0	8049	18288
Lift Axle	0	1548	0	1548
Tools/Driver	302	0	73	375
Fuel & DEF	565	0	224	789
Max Payload	3493	11672	31655	46820
Auxiliary Payload	0	0	0	0
Total	14600	13220	40000	67820
Specify Ground Load	14600	13220	40000	

Auxiliary Payload

Item	Location from FA CL	Weight	Point Description
Load Point #1	0	0	
Load Point #2	0	0	
Load Point #3	0	0	
Component(s)	-	0	Composite Totals

Fifth wheel slide length is 24 inches
 Selected rearmost setting is 0 inches
 Wheelbase measurement: 220 inches
 Overhang measurement: 60 inches

FRAME LAYOUT

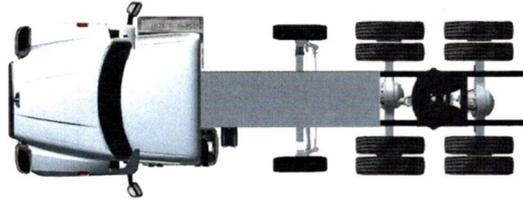

Note: The image displayed is representative only. It should not be construed as a layout diagram. Dimensions and components are not to scale.

Selected Options (Wheelbase: 220)

Sales Code	Description	Length	Side
6040550	Aftertreatment Aluminum Non-Slip Cab Entry	45.3	Right
5655059	DEF Tank Rectangular, 8 Gal	10.5	Left
5554190	26" Aluminum 100 Gallon Fuel Tank LH U/C	50.45	Left
6010390	Omit Standard Battery Box	12	Center

BID BOND

Travelers Casualty and Surety Company of America

Hartford, Connecticut 06183

CONTRACTOR:

(Name, legal status and address)

Peterbilt of Wyoming
1555 View Drive
Casper, WY 82601

SURETY:

(Name, legal status and principal place of business)

Travelers Casualty and Surety Company of America
One Tower Square
Hartford, CT 06183

OWNER:

(Name, legal status and address)

City of Douglas
101 North 4th Street
Douglas, WY 82633

BOND AMOUNT:

5% Five Percent of Amount Bid

PROJECT:

(Name, location or address, and Project number, if any)


New Specified 2025 Day Cab Tractor

The Contractor and Surety are bound to the Owner in the amount set forth above, for the payment of which the Contractor and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, as provided herein. The conditions of this Bond are such that if the Owner accepts the bid of the Contractor within the time specified in the bid documents, or within such time period as may be agreed to by the Owner and Contractor, and the Contractor either (1) enters into a contract with the Owner in accordance with the terms of such bid, and gives such bond or bonds as may be specified in the bidding or Contract Documents, with a surety admitted in the jurisdiction of the Project and otherwise acceptable to the Owner, for the faithful performance of such Contract and for the prompt payment of labor and material furnished in the prosecution thereof; or (2) pays to the Owner the difference, not to exceed the amount of this Bond, between the amount specified in said bid and such larger amount for which the Owner may in good faith contract with another party to perform the work covered by said bid, then this obligation shall be null and void, otherwise to remain in full force and effect. The Surety hereby waives any notice of an agreement between the Owner and Contractor to extend the time in which the Owner may accept the bid. Waiver of notice by the Surety shall not apply to any extension exceeding sixty (60) days in the aggregate beyond the time for acceptance of bids specified in the bid documents, and the Owner and Contractor shall obtain the Surety's consent for an extension beyond sixty (60) days.

If this Bond is issued in connection with a subcontractor's bid to a Contractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

When this Bond has been furnished to comply with a statutory or other legal requirement in the location of the Project, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

Signed and sealed this 25th day of July, 2024

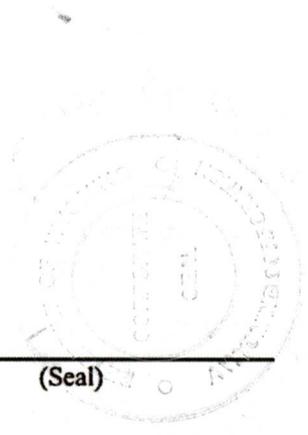


[Signature]
(Witness)

Peterbilt of Wyoming
(Principal) _____ (Seal)

By: [Signature]
(Title) _____

[Signature]
(Witness) Pat Allen

Travelers Casualty and Surety Company of America
(Surety) _____ (Seal)
By: [Signature]
(Title) Janeece Wilhelm Attorney-in-Fact

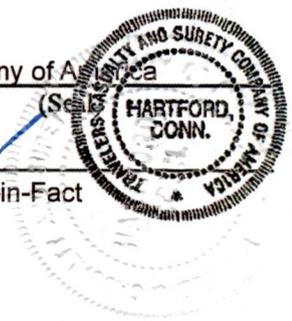



**Travelers Casualty and Surety Company of America
 Travelers Casualty and Surety Company
 St. Paul Fire and Marine Insurance Company
 Farmington Casualty Company**

POWER OF ATTORNEY

KNOW ALL MEN BY THESE PRESENTS: That Travelers Casualty and Surety Company of America, Travelers Casualty and Surety Company, St. Paul Fire and Marine Insurance Company, and Farmington Casualty Company are corporations duly organized under the laws of the State of Connecticut (herein collectively called the "Companies"), and that the Companies do hereby make, constitute and appoint Janece Wilhelm of Casper, WY, their true and lawful Attorney(s)-in-Fact to sign, execute, seal and acknowledge the following bond:

Surety Bond No.: Bid Bond
OR

Principal: Peterbilt of Wyoming

Obligee: City of Douglas

Project Description: New Specified 2025 Day Cab Tractor

IN WITNESS WHEREOF, the Companies have caused this instrument to be signed, and their corporate seals to be hereto affixed, this **21st** day of **April**, 2021.



State of Connecticut

By: 
 Robert L. Raney, Senior Vice President


City of Hartford ss.

On this the **21st** day of **April**, 2021, before me personally appeared **Robert L. Raney**, who acknowledged himself to be the Senior Vice President of each of the Companies, and that he, as such, being authorized so to do, executed the foregoing instrument for the purposes therein contained by signing on behalf of said Companies by himself as a duly authorized officer.

IN WITNESS WHEREOF, I hereunto set my hand and official seal.

My Commission expires the **30th** day of **June**, 2026




 Anna P. Nowik, Notary Public

This Power of Attorney is granted under and by the authority of the following resolutions adopted by the Boards of Directors of each of the Companies, which resolutions are now in full force and effect, reading as follows:

RESOLVED, that the Chairman, the President, any Vice Chairman, any Executive Vice President, any Senior Vice President, any Vice President, any Second Vice President, the Treasurer, any Assistant Treasurer, the Corporate Secretary or any Assistant Secretary may appoint Attorneys-in-Fact and Agents to act for and on behalf of the Company and may give such appointee such authority as his or her certificate of authority may prescribe to sign with the Company's name and seal with the Company's seal bonds, recognizances, contracts of indemnity, and other writings obligatory in the nature of a bond, recognizance, or conditional undertaking, and any of said officers or the Board of Directors at any time may remove any such appointee and revoke the power given him or her; and it is

FURTHER RESOLVED, that the Chairman, the President, any Vice Chairman, any Executive Vice President, any Senior Vice President or any Vice President may delegate all or any part of the foregoing authority to one or more officers or employees of this Company, provided that each such delegation is in writing and a copy thereof is filed in the office of the Secretary; and it is


FURTHER RESOLVED, that any bond, recognizance, contract of indemnity, or writing obligatory in the nature of a bond, recognizance, or conditional undertaking shall be valid and binding upon the Company when (a) signed by the President, any Vice Chairman, any Executive Vice President, any Senior Vice President or any Vice President, any Second Vice President, the Treasurer, any Assistant Treasurer, the Corporate Secretary or any Assistant Secretary and duly attested and sealed with the Company's seal by a Secretary or Assistant Secretary; or (b) duly executed (under seal, if required) by one or more Attorneys-in-Fact and Agents pursuant to the power prescribed in his or her certificate or their certificates of authority or by one or more Company officers pursuant to a written delegation of authority; and it is

FURTHER RESOLVED, that the signature of each of the following officers: President, any Executive Vice President, any Senior Vice President, any Vice President, any Assistant Vice President, any Secretary, any Assistant Secretary, and the seal of the Company may be affixed by facsimile to any Power of Attorney or to any certificate relating thereto appointing Resident Vice Presidents, Resident Assistant Secretaries or Attorneys-in-Fact for purposes only of executing and attesting bonds and undertakings and other writings obligatory in the nature thereof, and any such Power of Attorney or certificate bearing such facsimile signature or facsimile seal shall be valid and binding upon the Company and any such power so executed and certified by such facsimile signature and facsimile seal shall be valid and binding on the Company in the future with respect to any bond or understanding to which it is attached.

I, **Kevin E. Hughes**, the undersigned, Assistant Secretary of each of the Companies, do hereby certify that the above and foregoing is a true and correct copy of the Power of Attorney executed by said Companies, which remains in full force and effect.

Dated this 25th day of July, 2024.




 Kevin E. Hughes, Assistant Secretary

To verify the authenticity of this Power of Attorney, please call us at 1-800-421-3880.

Please refer to the above-named Attorney(s)-in-Fact and the details of the bond to which this Power of Attorney is attached.





STATE OF WYOMING CERTIFICATE OF RESIDENCY



Contractor Number: 0994

PETERBILT OF WYOMING

HAS BEEN GRANTED RESIDENCY STATUS PURSUANT TO WYOMING STATUTE 16-6-101, AS AMENDED. FIVE PERCENT PREFERENCE SHALL BE ALLOWED WHEN BIDDING ON ANY PUBLIC WORKS CONTRACT FOR A PERIOD OF ONE (1) YEAR FROM THE DATE CERTIFICATION IS GRANTED. GRANTED THIS 2ND DAY OF DECEMBER TWO THOUSAND AND 23

A handwritten signature in black ink, appearing to read "Michele Johnson".

Michele Johnson, Program Manager

EXPIRATION DATE: 12/1/2024

To verify the authenticity of the certificate,
please contact our office at 307-777-7261 or visit
wyomingworkforce.org/businesses/labor/info



CERTIFICATE SERIAL NUMBER: 0212202306